
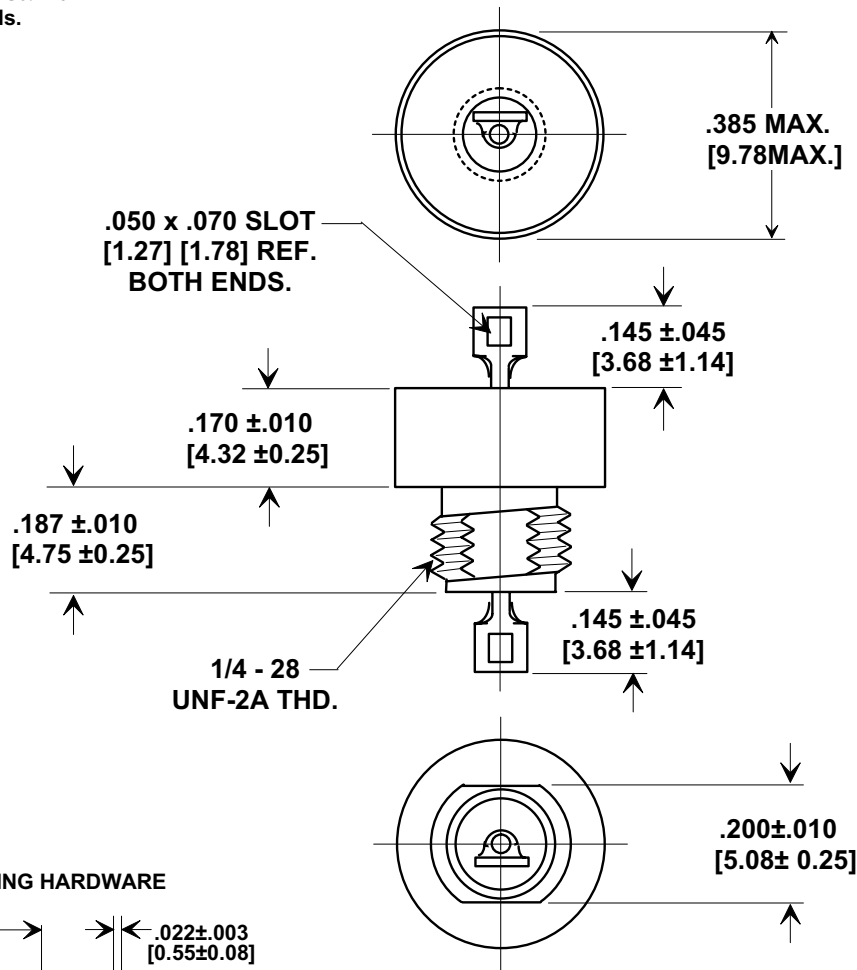




# MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING  
 DIMENSIONS IN METRIC - [ ]


Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



### MOUNTING HARDWARE



LOCK WASHER



HEX NUT

### NOTES:

#### MATERIALS:

- BUSHING - TIN PLATED STEEL
- LEAD - SOLDER PLATED COPPER
- NUT - TIN PLATED BRASS
- L'WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE: 8 lb - ins. max
- SEAL TESTED PER MIL-STD-202 METHOD 112 CONDITION A.
- DCR - .01Ω max.
- MAX. SOLDER TEMPERATURE 500°F

Cx REF. ONLY	WORKING VOLTAGE DC 125°C	CURRENT D.C.	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
			30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	1 GHz
1.4 μF REF.	50	10 A	15	28	33	44	60	70

X-2015 Rev-0	REVISION RECORD	0	1
	Original Release	C.O. 19990714-5-01	
	ADDED CX & ORIENTATION.	S.M. 12-18-01	
		20011210-2-13	

--TOLERANCES-- Unless Otherwise Specified		Title <b>MI5733/38-0004 HERMETICALLY SEALED BUSHING MOUNT EMI FILTER</b>	
DECIMAL ± // //		Drawn S.M. 07-15-99	Scale X 3
ANGLES ± // //		Approved H.R. 07-15-99	
<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b>	<b>4601-503</b>