


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

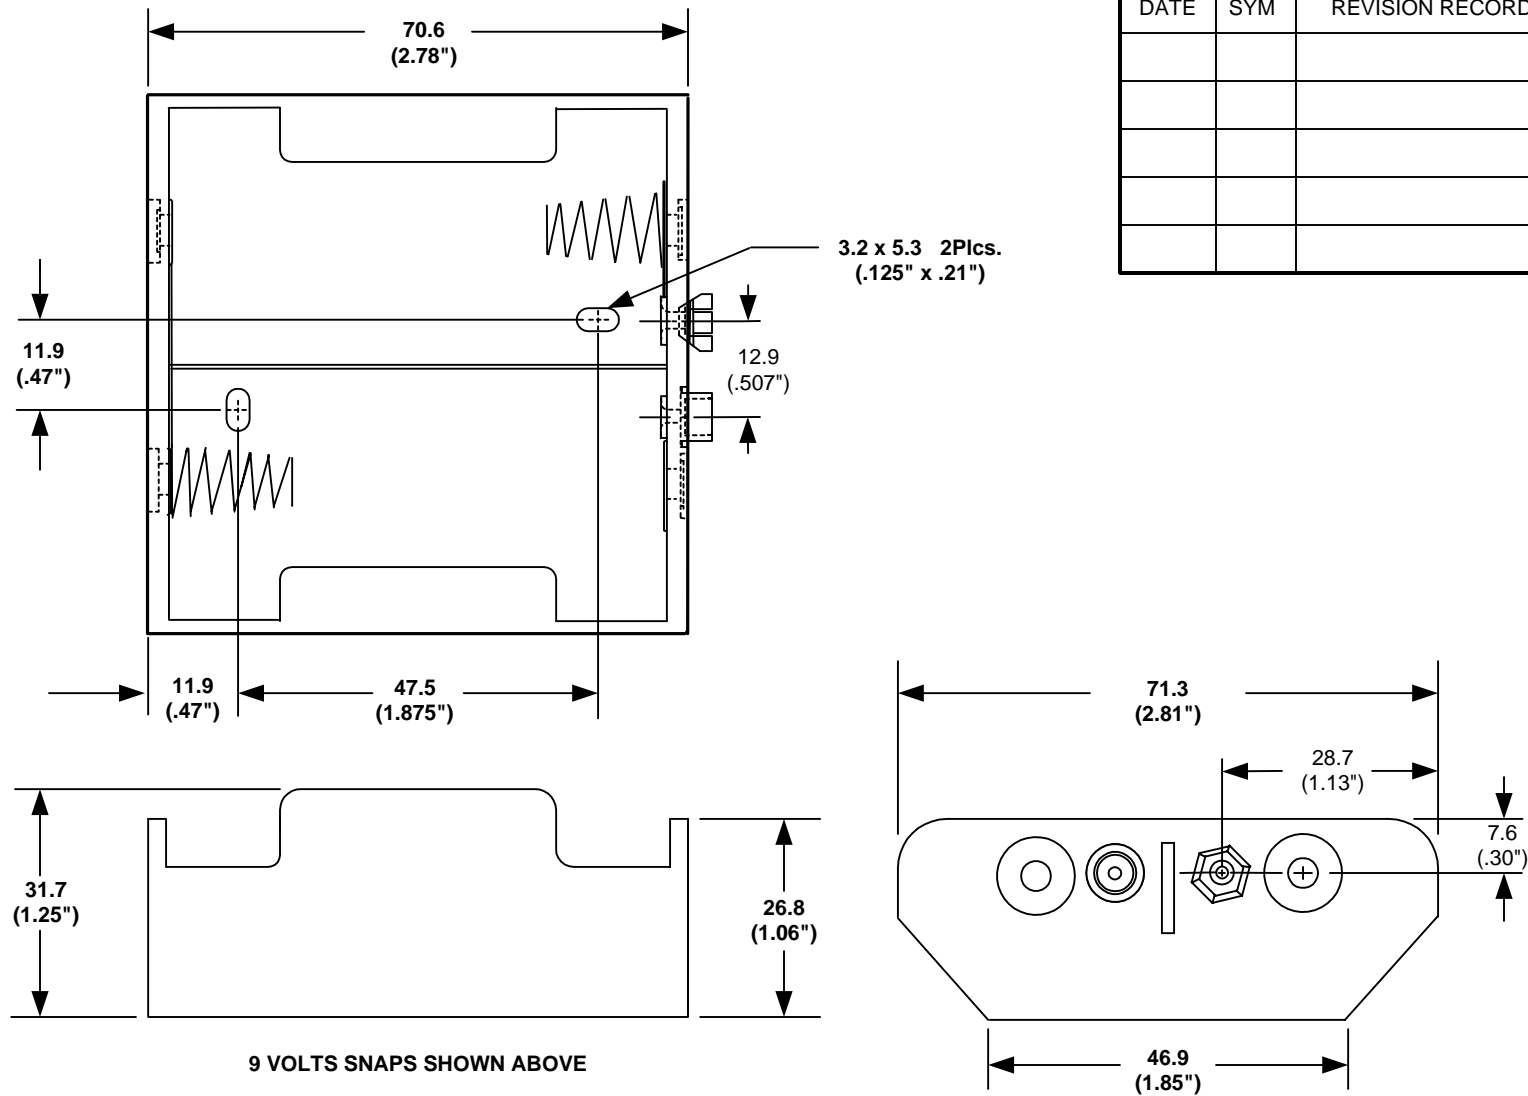


ORDERING CODE BH2D

SPECIFICATIONS:

- Plastic material - polypropylene
- Springs - nickel plated spring steel
- Wire - 152.4 mm Ref.Long 26 AWG, UL1007, CSA - TR-64, 300V, 80°C.
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	=	L
(6") WIRE LEADS	=	W
9VOLT TYPE SNAPS	=	SF
BUMP PLATES	=	B

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")			APPROVED BY
FRACTIONAL	TITLE	TWO "D" CELL HOLDER	
+ .8 (.030")	DATE	DRAWING NUMBER	
ANGULAR	09/18/2000	BH2DSF	
+ 3°			